

Features

- 24 Channel Lighting Console
- Two Preset Manual Operation
- 12/24 Channels
- Flash Buttons
- 12 Sequences of 99 Steps
- Multiple Channels per Step
- Sequence Master
- 19" Rack Mounting
- Fade Timer
- Speed Control
- True Dipless Crossfade
- Grand Master
- Wide Mode
- External Power Supply



Overview

Juggler is a 19" rack mount manual lighting control desk specifically designed for the smaller stage; a perfect solution for small scale lighting systems. Channel faders are set in a conventional two preset layout for easy crossfading. A fade time control allows smooth fades to be achieved over periods as long as 5 minutes. All crossfades are true dipless. This ability to hold constant lighting levels and varying fade times allows sophisticated lighting plots to be replayed simply and accurately.

Juggler controls up to 24 channels using preset faders avoiding the cost and complexity of more sophisticated lighting desks. Applications include schools, houses of worship, rental and conference events.

For larger shows, the wide mode feature allows 24-channel operation, with an internal scene store for two-preset operation. 12 sequences of 99 steps can be stepped manually to provide a simple cue list with go button functionality. Sequences may also be chased using the adjustable speed control.

Quality you can trust

- ✓ 3 years warranty
- ✓ On-line training videos
- ✓ Free software upgrades

- ✓ Real people to help you
- ✓ Downloadable web resources
- ✓ ISO 9001:2008 Certified

40 Years of Lighting Passion

- ✓ Multilingual training team
- ✓ Support forum

Ordering Information

Juggler (UK PSU):	00-129-11
Juggler (Schuko PSU):	00-129-21
Flight Case:	00-766-00


Supplied Accessories

Power Supply
Operating Manual

Specifications

- Control Channels: 24
- Channel Faders: 24
- Flash Buttons: 12
- Preset Master Faders: 2
- Fade Time Controls: 1
- Sequence Speed Control: 1
- Sequence Master Fader: 1
- Sequence/Step Indication: 2-digit 7-segment display
- Grand Master Fader: 1
- Power Supply: In-line transformer, CEE22 input, 4 pin XLR output
- Supply Voltage: 100 - 240 Volts AC
- Supply Frequency: 50 – 60 Hz
- DMX Output: DMX 512 via XLR 5 fixed socket. Data output to USITT DMX-512 1990. Data on channels 1-24. Overvoltage protected
- Dimensions: 88mm(H) x 483mm(W) x 266mm(D)
- Weight: 4.5 Kg (10lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

Dimensions

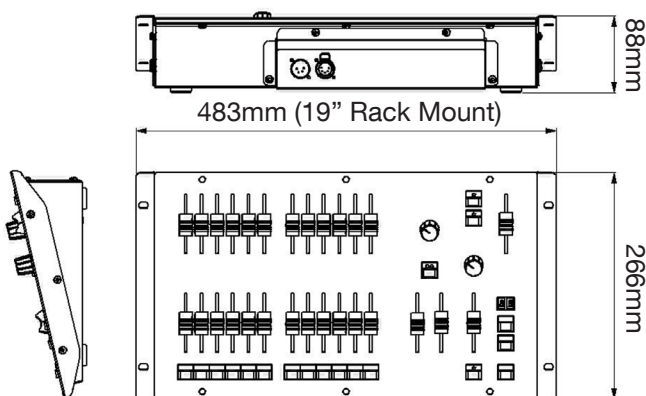

	Voltage	100V <input checked="" type="checkbox"/>	220 - 240V NON CE <input checked="" type="checkbox"/>	Standards 					
		110 - 127V <input checked="" type="checkbox"/>	277V <input type="checkbox"/>						
		230V CE <input checked="" type="checkbox"/>	347V <input type="checkbox"/>						

This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

Zero 88

Cooper Controls Ltd, Usk House, Lakeside,
Llantarnam Park, Cwmbran, Torfaen, NP44 3HD, UK.
Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880
E-mail: enquiries@zero88.com Web: www.zero88.com