

EB 575 / 800

Main Features



- Small and compact size
- Lightweight
- Double wattage: 575 and 800 W bulbs
- Automatic detection of connected 575 or 800 W luminaire
- Controllable frequency: choose between low noise, flicker free or high speed
- CCL (Compensation of Cable Loss)
- ALF (Active Line Filter)
- Continuous dimming from 50 to 100 %
- DMX controlled (On/Off; dimming)
- Comfortable and easy to use DMX setting via luminous display
- Robust aluminium casting and additional edge protection
- Easy to operate and user friendly

Specially designed for the M8 is ARRI's new small and lightweight EB 575/800 ballast, which can also be used with 575 W lampheads. In common with other new-generation ballasts from ARRI, it features CCL (Compensation for Cable Loss) technology and the power-saving ALF (Active Line Filter). The DMX-compatible EB 575/800 offers continuous dimming from 50 to 100% and a choice of four frequency modes for low noise (50 / 60 Hz), flicker-free (75 Hz) or High Speed (1,000 Hz) operating – all in a robust, easy-to-use package. EB 575/800 recognizes the connected luminaire by the lamphead, not by the inserted lamp.



Electronic Ballasts

L2.76184KH	EB 575/800 HS, Int, port, 115/230 V, ALF, VEAM, LN:50/60Hz, ff: 75/1000Hz,
------------	--

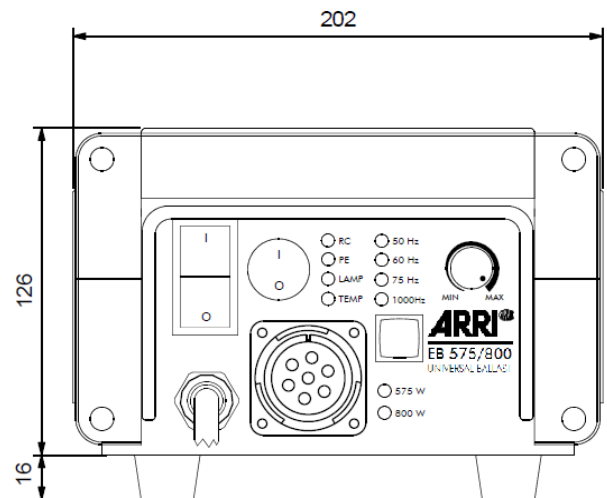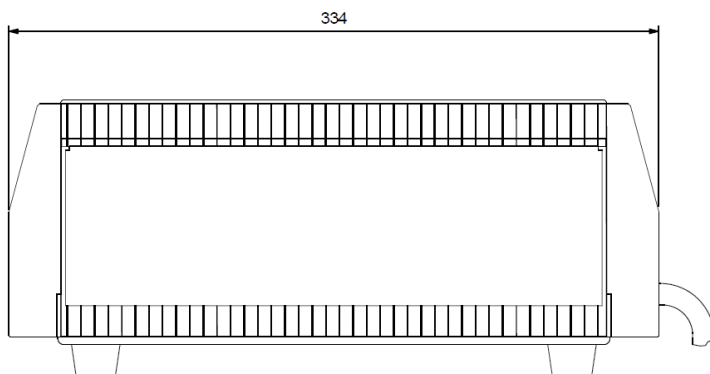

Technical Specifications

EB 575/800

Ballast Type:	Electronic High Speed Ballast	
Lamphead Types:	ARRI D / X / Compact / Daylight 575 W ARRI 800 W Daylights (with CCL)	
Input Voltage (range):	90 - 130 V; 180 - 250 V; 50/60 Hz; 1, N, PE (single phase)	
Input Current (nominal):	11,1 - 8,9 A / 5,8 - 4,4 A	
Maximal Apparent Power:	1160 VA (max. in CCL mode)	
Power factor (cos j):	approx. 0,98	
Efficiency:	approx. 88 %	
Active Line Filter (ALF):	√	
Ignition:	cold strike and hot restrike (automatically limited < 1 sec)	
Typical Light Ripple:	< 3 %	
Dimmability:	50 - 100 % of the nominal value via	
DMX Remote Control:	DMX 512 Standard	
DMX Functions:	ballast ON/OFF; dimming of lamp power	
DMX Connector:	XLR 5-pin male (in) and female (out)	
Automatic Lamp Detection:	-	
Automatic Lamphead Detection:	√	
Compensation of Cable Loss (CCL):	√	
LED Indication	DMX:	√
	Protective Earth:	√
	Lamp On:	√
	Over Temperature:	√
	Frequency Mode:	√
	Lamphead:	√
Temperature Controlled Fan:	√	
Output Frequency	Flicker Free Mode:	75 Hz / 1000 Hz (High Speed)
	Low Noise Mode:	50 Hz / 60 Hz
Output Connector:	international connector (VEAM)	
Product Size (H x W x L)	142 x 202 x 334 mm	
Product Weight:	approx. 6,5 kg	
Maximum Ambient Temperature:	50°C	
Protection Class:	I / IP 22	
Certifications:	CE	