


SPECIFICATIONS

Identity No.	L04025DPB
Capacity	4,000W / 2,500W
Lamp Blub Voltage	200V / 115V
UV Protective Lens	Ø645mm
Lamp Type	HMI 4000W/SE or HMI 2500W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C / 150 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m / 8 m
Min. Distance to Flammable Object	1.2 m / 1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	55 kg




L04025DPB


ACCESSORIES



Electronic Ballast
4kW / 2.5kW



Head to Ballast Cable
(7m or 15m)



Transport Case


LAMPHEAD CONTENTS

Lamp Housing with

- High Reflective Parabolic Glass Mirror
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm Spigot

Exclude Lamp Bulb

PHOTOMETRIC DATA

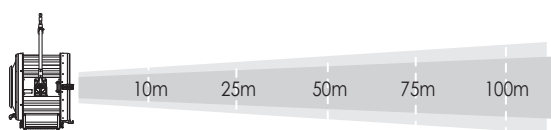

		10m	25m	50m	75m	100m
4kW	Spot	Lux 151470	24240	6060	2690	1520
		Beam Ø 0.61 m	0.61 m	0.61 m	0.61 m	0.61 m
Flood	Lux 19920	3190	800	350	200	
	Beam Ø 2.40 m	6 m	12.01 m	18.01 m	24.02 m	
2.5kW	Spot	Lux 109160	17470	4370	1940	1090
		Beam Ø 0.61 m	0.61 m	0.61 m	0.61 m	0.61 m
Flood	Lux 12460	2030	510	230	130	
	Beam Ø 2.4 m	6 m	12.01 m	18.01 m	24.02 m	

DIMENSIONS (mm)

