

Power Beam

DAYLIGHT

9kW/6kW

FILMGEAR®

L09060DPB




LAMPHEAD CONTENTS


Lamp Housing with

- High Reflective Parabolic Glass Mirror
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm Spigot
- # Exclude Lamp Bulb


ACCESSORIES



Electronic Ballast
9kW / 6kW



Transport Case




Head to Ballast Cable
(10m or 15m)

SPECIFICATIONS

Identity No.	L09060DPB
Capacity	9,000W / 6,000W
Lamp Blub Voltage	160V / 125V
UV Protective Lens	Ø645mm
Lamp Type	CSR 9000W/SE/HR or HMI 9000W/SE or HMI 6000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	15m
Min. Distance to Flammable Object	1.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	55 kg



PHOTOMETRIC DATA



10m 25m 50m 75m 100m

9kW	Spot	Lux	340808	54530	13634	6060	3410
		Beam Ø	0.61 m	0.61 m	0.61 m	0.61 m	0.61 m
Flood	Lux	44811	7172	1800	797	449	
	Beam Ø	2.40 m	6.00 m	12.01 m	18.01 m	24.02 m	
6kW	Spot	Lux	227205	36353	9089	4040	2273
		Beam Ø	0.61 m	0.61 m	0.61 m	0.61 m	0.61 m
Flood	Lux	29874	4781	1200	531	299	
	Beam Ø	2.40 m	6.00 m	12.01 m	18.01 m	24.02 m	

DIMENSIONS (mm)

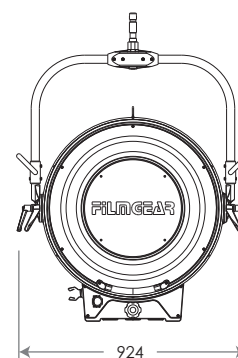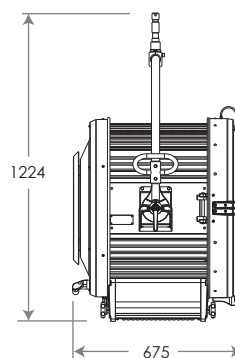

FILM GEAR INT. reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice. © 20210715

Film Gear (International) Ltd. No.7, Cumberland Road, Kowloon Tong, Hong Kong ☎ (852) 2794 3608 📠 (852) 2794 3662 ✉ info@filmgear.net
 Film Gear USA Group 9528 East Rush Street, Suite A South El Monte, CA 91733, U.S.A ☎ 1-323-780-8880 ✉ joanna@filmgearusa.com

www.filmgear.net