## LED CYCLIGHT

## NanoPix CYC\*8

Asymetric cyclorama LED floodlight with 8 base colours for perfect colourmixing



## TECHNICAL DATA

Supply Voltage	100-240 VAC 50/60 Hz
max. Powerconsumtion	ca. 320 W
PowerCon In/Out 5-pin-XLR In/Out	✓
LED Modules	750 LED`s 8 Colors
Variable Colourtemperature	2700-9000K
OLED Display for configuration	✓
Control	USITT DMX 512/1990
DMX Channels	8/9/10/24/25/26/48/49
8/16-bit resolution	✓
Seperate Channels for Intensity and Colour	✓
Highresolution Dimmer from 0-100%	✓
Suitable for HDTV "flicker-free"	✓   1500Hz   3000Hz
up to 25 Hz Strobe-Frequency	✓
Sensor Controlled Cooling	✓
Extruded aluminum profile	✓
Weight/Dimension	ca. 12kg / L 702mm x H 136/317mm x B 302mm
protection class	IP 20
Quiet Mode	✓
Manual Mode   Standalone Mode   RDM	<b>√</b>   <b>√</b>   <b>√</b>












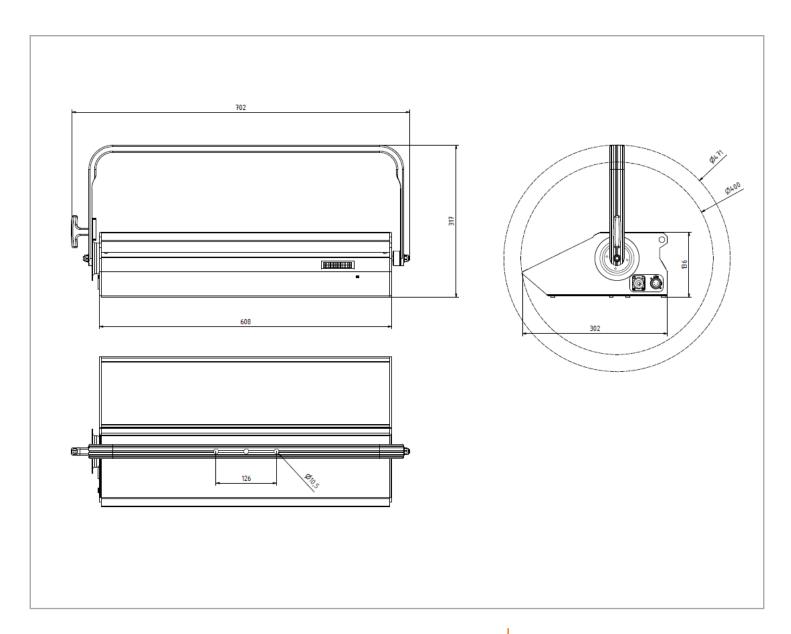



Lighting Design Development Electronics LDDE Vertriebsgesellschaft m. b. H. Simmeringer Hauptstr. 357, 1110 Vienna, Austria P: +43 1 7671811 0, F: +43 1 7671811 99 E: office@ldde.com, W: www.ldde.com