


**Lupo**  
Made in Italy

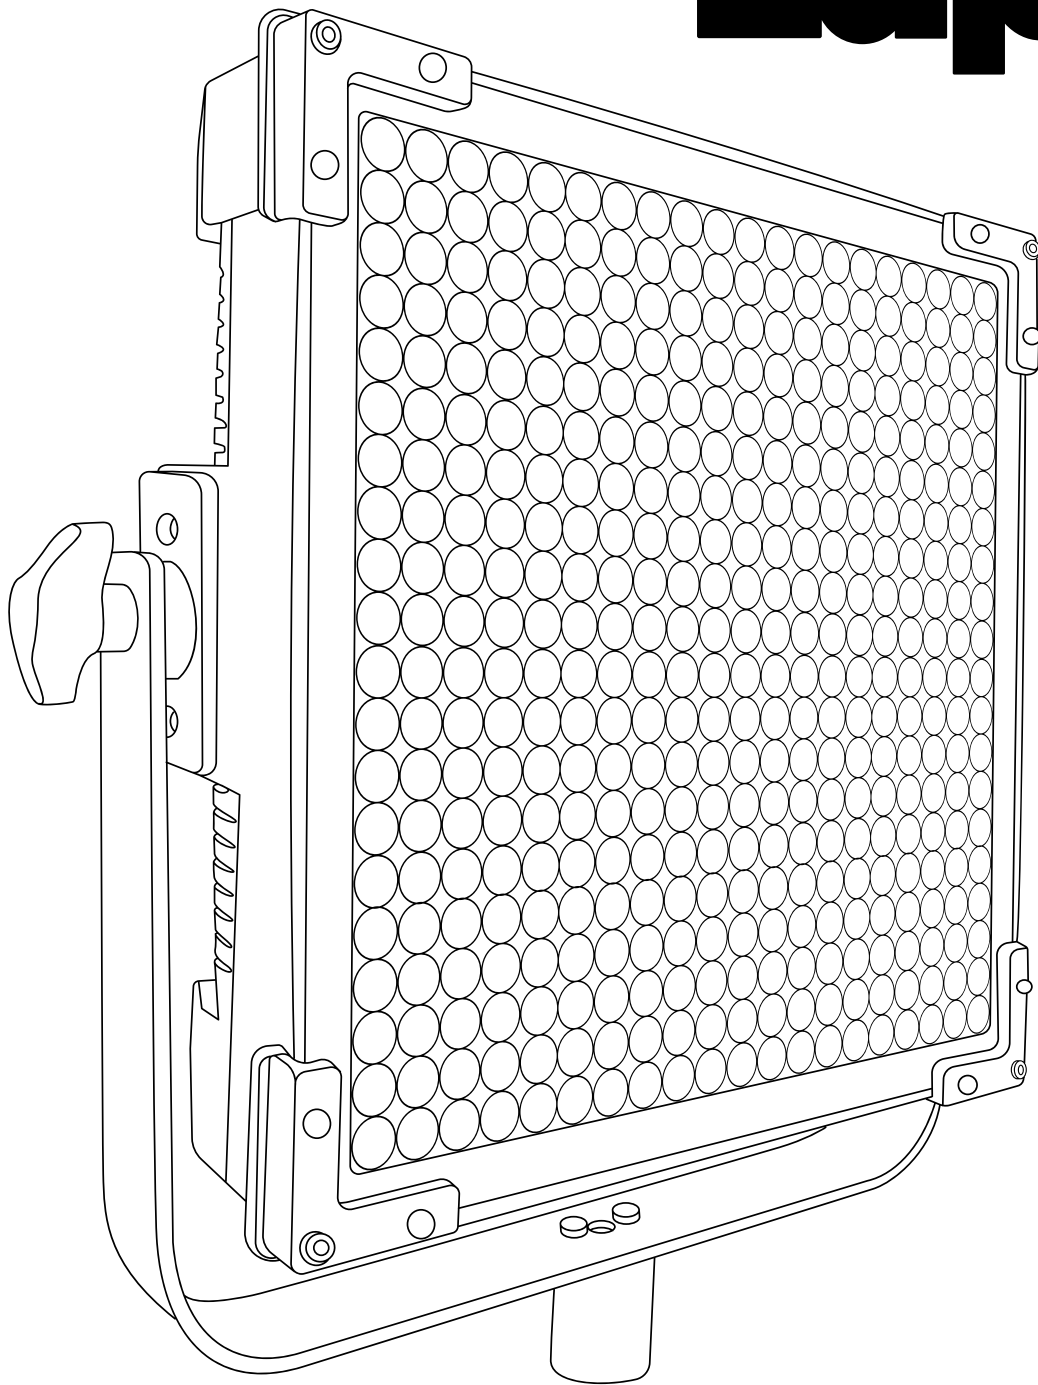

Cod 501PRO


# HyperpanelPRO Dual Color 30 Hard

## Technical Data

|   |                                  |
|---|----------------------------------|
| Dimensions (cm)   | 350 x 353 x 117 mm               |
| Dimensions (in)   | 13.7 x 13.8 x 4.6 in             |
| Weight (kg)   | 4,9 Kg                           |
| Weight (lb)   | 10.8 lb                          |
| CRI (Colour Rendering Index)  | 95                               |
| TLCI (Television Lighting Consistency Index)  | 96                               |
| Estimated LED lifetime (L80)  | 50,000 hours                     |
| Dimmer 0 - 100  | included                         |
| Dimming curves mode   | Linear, Exponential, Logarithmic |
| DMX module  | included                         |
| DMX (bit)   | 8 bit / 16 bit                   |
| Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive) | included                         |
| Standard XLR 5 pin connectors to DMX console  | included                         |
| Watt consumption  | 280 W                            |
| Firmware upgrades   | through USB port                 |
| Colour temperature  | 2800 K - 6500 K                  |
| Voltage AC  | 90 V - 240 V                     |
| Voltage DC  | 24 V                             |
| Light beam  | 40°                              |
| Frequency (input)   | 50 / 60 Hz                       |
| Compliance  | CE                               |
| Remote control  | Bluetooth Long Range / DMX / RDM |
| Ambient temperature   | Max: + 45°C / Min: - 10°C        |
| Power factor  | 0.96                             |

| Photometric data     | 6500 K | 5600 K | 3200 K |
|----------------------|--------|--------|--------|
| Distance             |        |        |        |
| Lux at 1 m - 3.2 ft  | 100000 | 98000  | 95000  |
| Lux at 2 m - 6.5 ft  | 26500  | 25500  | 24000  |
| Lux at 3 m - 9.8 ft  | 11500  | 11000  | 10500  |
| Lux at 4 m - 13.1 ft | 6550   | 6300   | 5800   |
| Lux at 5 m - 16.4 ft | 4150   | 4100   | 4000   |

# Technical Drawing

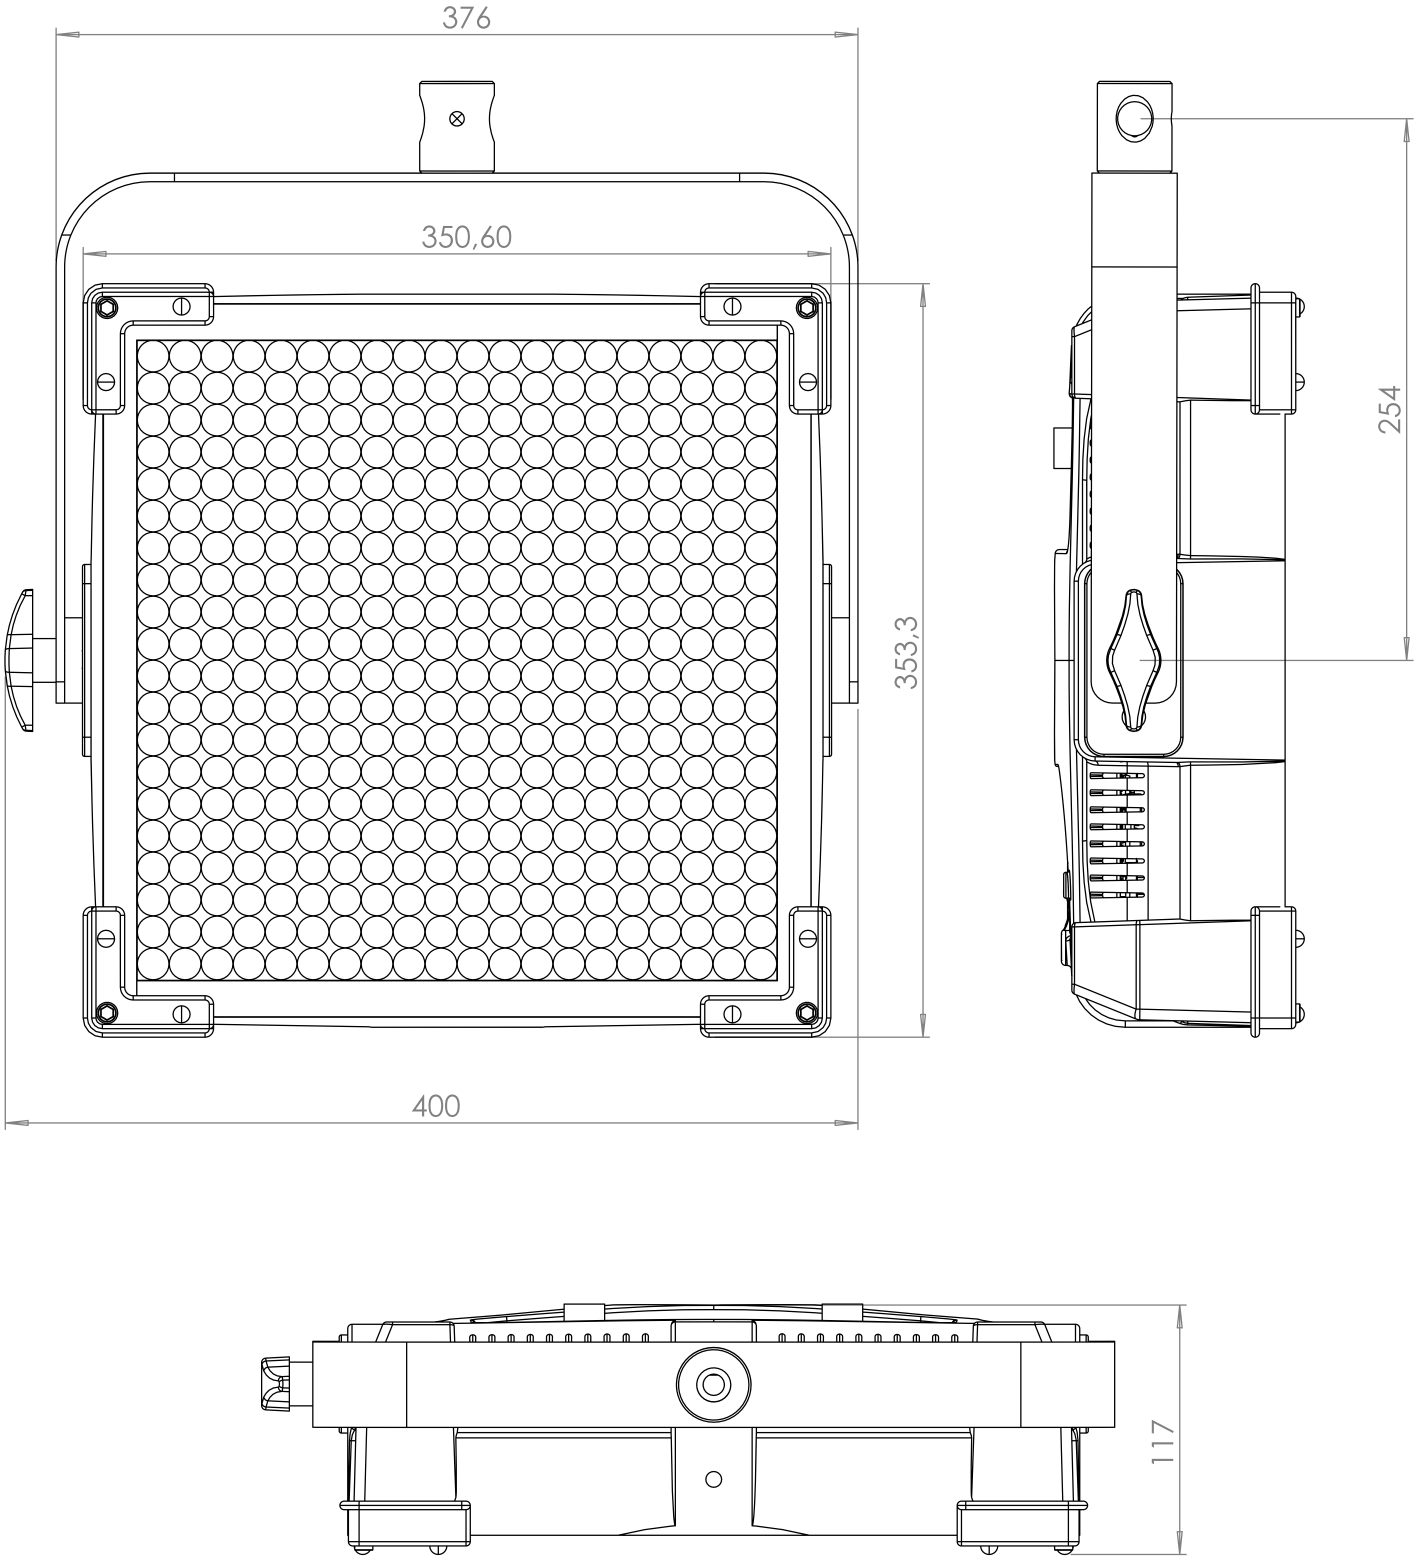

# Pole Operated Yoke

