


**Lupo**  
Made in Italy

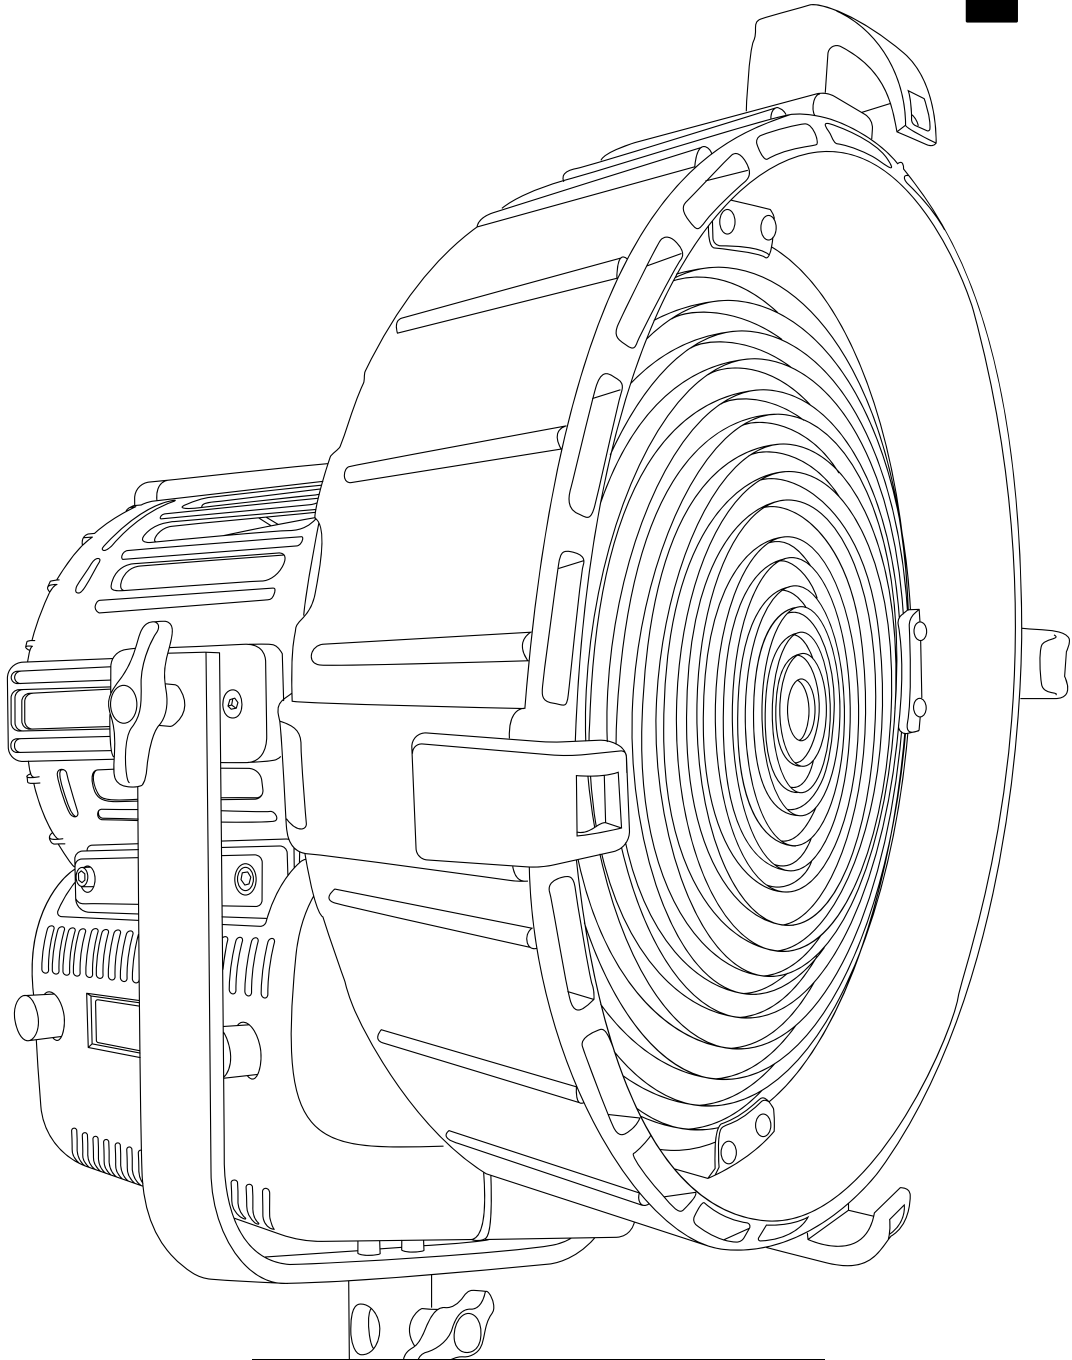

Cod 317 PRO

**DayledPRO 5000**  
**Full Color**

## Technical Data

Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	8 kg
Weight (lb)	17.6 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	500 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR	included
4 pin connector (pin 1: negative / pin 4: positive)	
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	380 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	2800 K - 10000 K
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

## Photometric data

Distance	6500 K		5600 K		3200 K	
	spot	flood	spot	flood	spot	flood
Lux at 1 m - 3.2 ft	-	-	-	-	-	-
Lux at 2 m - 6.5 ft	36000	4800	34500	4600	31000	4400
Lux at 3 m - 9.8 ft	17500	2200	16500	2050	15500	2020
Lux at 4 m - 13.1 ft	9500	1200	9100	1180	8650	1150
Lux at 5 m - 16.4 ft	5900	800	5650	780	5500	760
Lux at 10 m - ft	1550	230	1480	225	1390	220

# Mode Options

## **CCT (Correlated Color Temperature)**

Mode for variable color temperature control from 2700 K to 10000 K with the addition of plus and minus green/magenta offset.

---

## **HSI (Hue, Saturation and Intensity)**

Mode for full color control.

---

## **RGBW**

Mode for control of Red, Green, Blue and White independently.





---

## **Preset**





Mode for a selected variety of gels.

---

# Technical Drawing

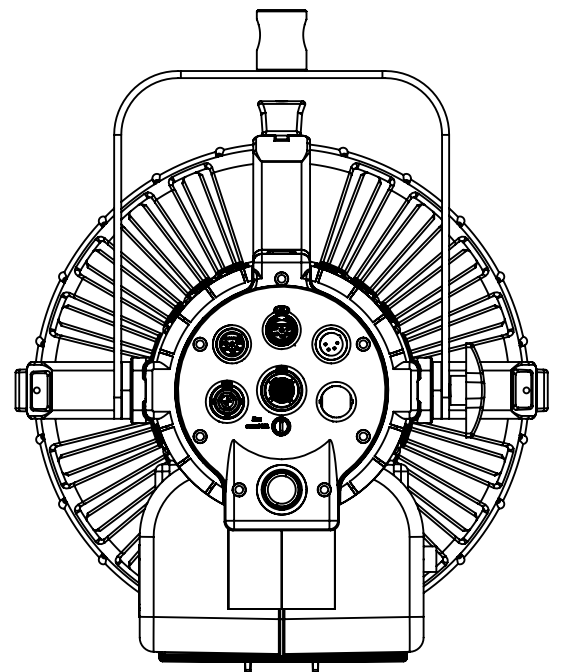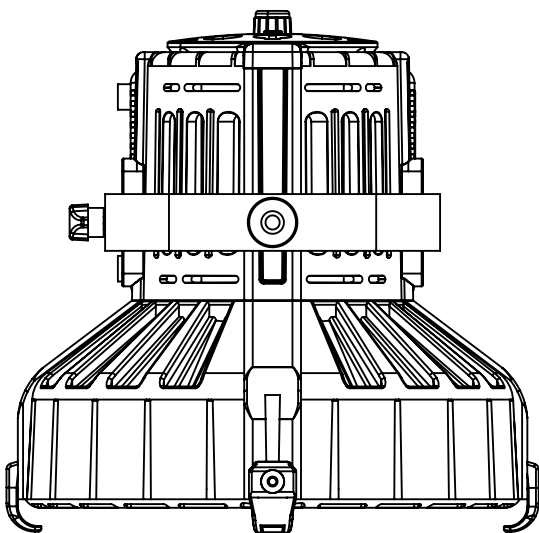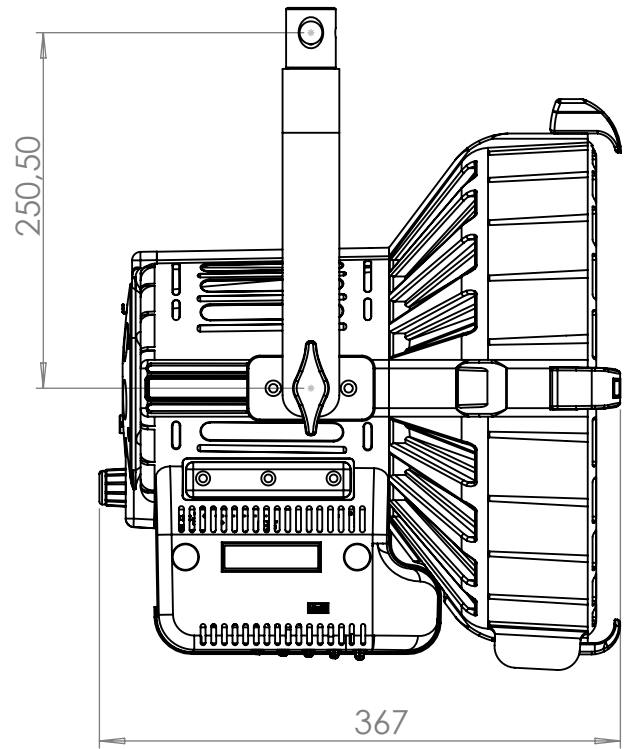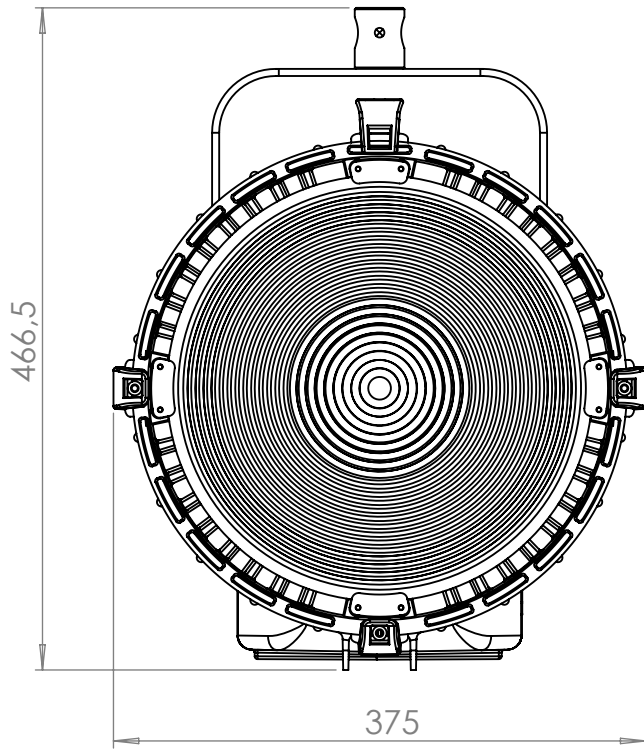

# Pole operated yoke

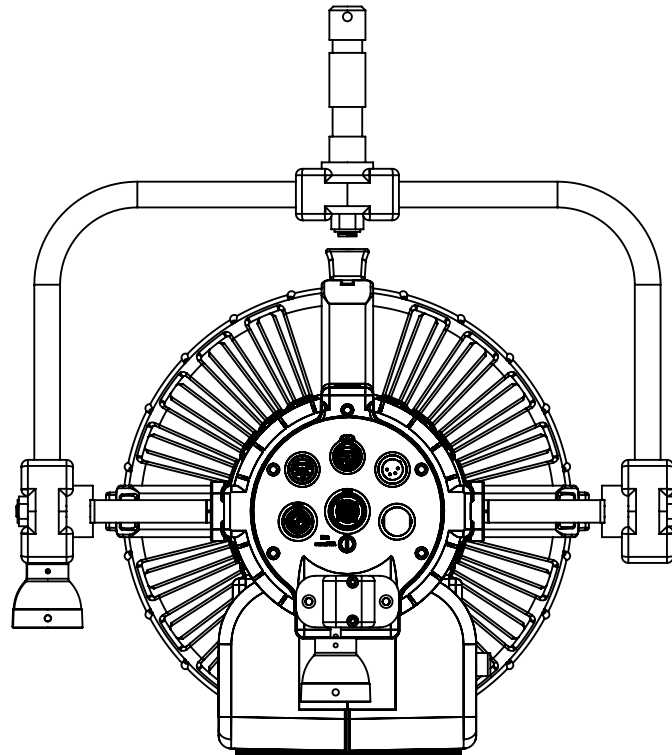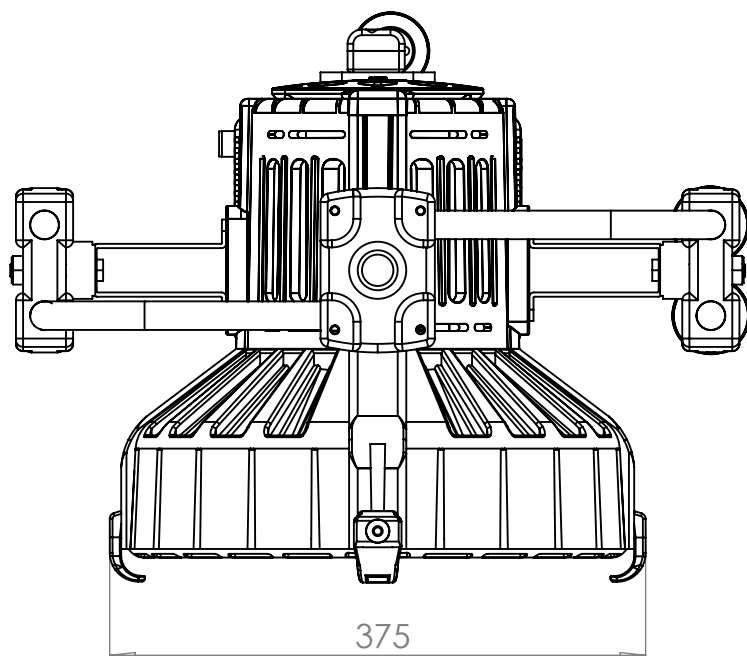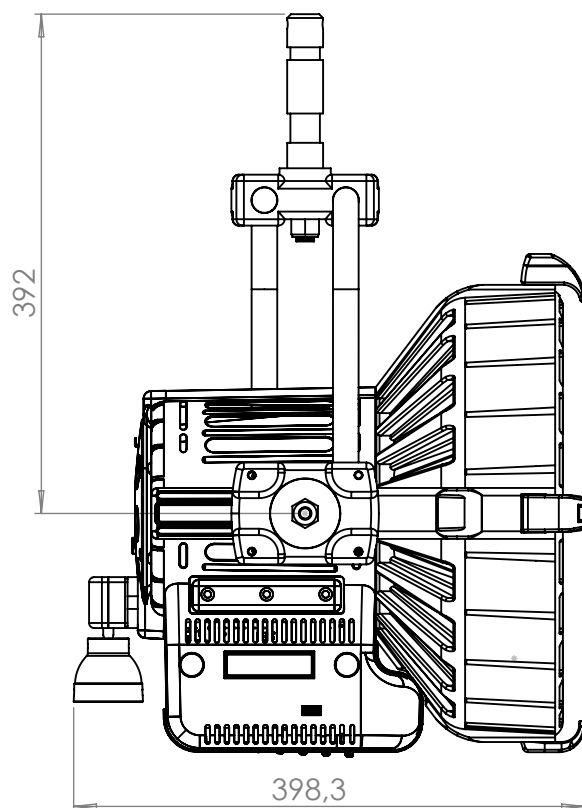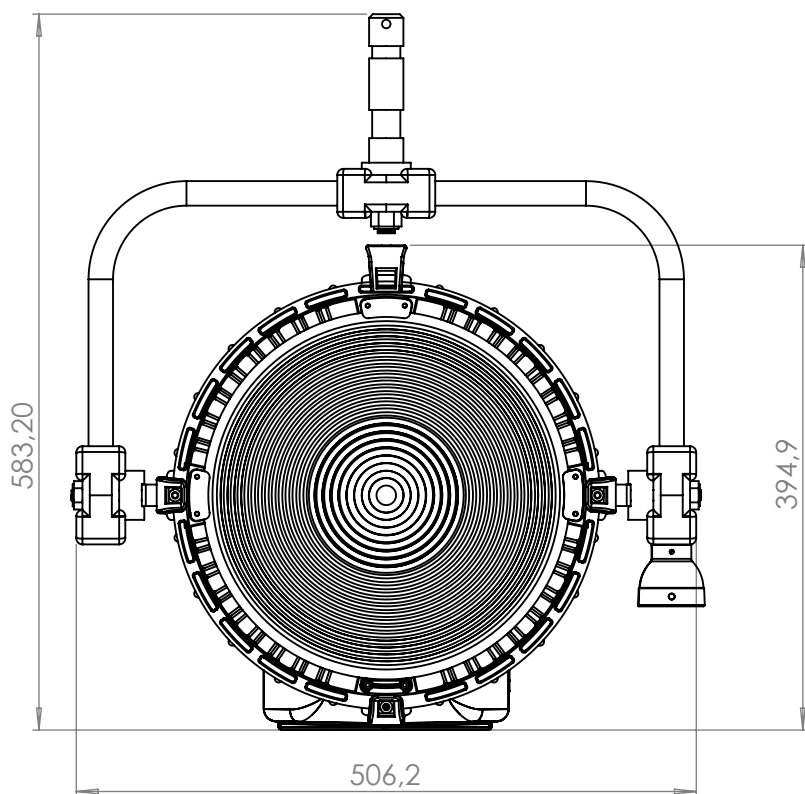

**Lupo**  
Made in Italy

Lupo srl - Via V. Sassi 28 Collegno (TO) - 10093 - Italy  
Phone: +39 011 411 9919 / e-mail: [contact@lupo.it](mailto:contact@lupo.it)  
website: [www.lupo.it](http://www.lupo.it)