



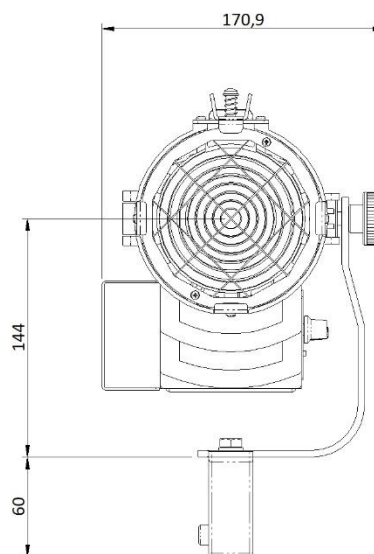

Technical features

Power	30W
Color Temperature (CCT)	Continuously adjustable from 2800 K to 6500 K
Dimming	0 to 100% super smooth with no color shift
CRI	95 at 5600K 92 at 3200K
Optics	80mm Fresnel lens
Beam angle	16° to 74° (50% of center value)
Cooling	Super silent fan
Tilt angle	+/- 90°
IP rating	IP20
Estimated LED lifetime	45.000 hours (L70)
Power supply	Integrated PSU IN: 90-264Vac 50/60Hz
Control	Local control by encoders for dimming and color setting, remote DMX/RDM
User control panel	1.4" LCD graphic display, one encoder, four push Buttons
Connectivity	Power cable for main XLR 5 F/M In-Through for DMX Mini USB for software upgrade through PC
Mounting	16mm Socket
Weight	M.O. version: 1.1 Kg

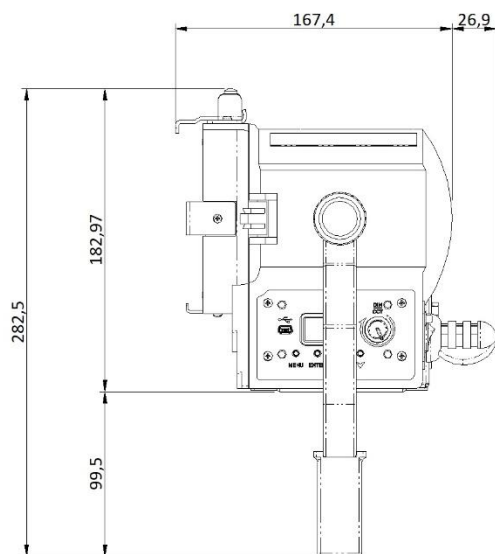

Photometrics Data

TYPICAL PERFORMANCE

Distance		2 m 6.6 ft		3 m 9.8 ft		5 m 16.4 ft	
CCT (Tunable from 2800 K to 6500 K)		3200 K	5600 K	3200 K	5600 K	3200 K	5600 K
OUTPUT SPOT 16°		912 lx 85 fc	950 lx 88 fc	405 lx 38 fc	422 lx 39 fc	146 lx 14 fc	152 lx 14 fc
BEAM DIAMETER 16°		0.6 m 2 ft	0.6 m 2 ft	0.8 m 2.6 ft	0.8 m 2.6 ft	1.4 m 4.6 ft	1.4 m 4.6 ft
OUTPUT FLOOD 74°		278 lx 26 fc	290 lx 27 fc	124 lx 11 fc	129 lx 12 fc	44 lx 4 fc	46 lx 4 fc
BEAM DIAMETER 74°		3 m 9,8 ft	3 m 9,8 ft	4.5 m 14.8 ft	4.5 m 14.8 ft	7.5 m 24.6 ft	7.5 m 24.6 ft
Beam angle at 50% of center value							

Technical specifications and data are provided for guidance only. Due to improvement in technology and/or in products, all product, specs and data are subject to change without notice. COSMOLIGHT accepts no liability for any errors, inaccuracies or incompleteness contained herein.