

LUTIN - 306LPC

306 - 1000 W TUNGSTEN



- **Type:** Single lens luminaire
- **Source:** 1000 W Tungsten
- **Optics:** 150 mm Plano Convex lens

Single lens

Compact 3-in-1 fixture

Lutin is a multi-purpose 1K PC lensed fixture providing good directional light for smaller venues, schools and rental companies. Lenses can be quickly changed to PB or Fresnel for extra versatility.

Features

- **Colour runners:** Double runners to hold accessories and colour filters
- **Barn door:** Unique rotating barn door with 4 individually rotating blades – makes even the most difficult angle possible
- **Focus adjustment:** Smooth focus adjustment from rear, even when lantern is hot, for a longer lamp life
- **Focus reference:** Index for easy focus reference
- **Tilt reference on hanging yoke:** Index for rapid re-positioning

Optical

- **Choice of 3 lenses:** Fresnel, Plano-Convex & Pebble-Convex – no tools required
- **Theatre front cassette:** No light spill to distract audiences or performers
- **A clean beam:** Paint and light traps to avoid light leaks

Construction

- **Made in France :** Fully manufactured on the premises retaining complete control over all aspects of quality
- **Air vents:** Efficient cooling with no light spill
- **Bodywork:** Strong sheet metal construction for durability
- **Internal cable guide:** To prevent cables from becoming entangled in movable lamp tray
- **Moving parts:** Smooth at all times, even when hot
- **Captive knobs and handles:** Additional security when working at height or in transit
- **Access:** Easy access to lamp house and lenses through top opening for fast and efficient maintenance
- **Easy access to all parts:** Easy cleaning, re-lamping and maintenance
- **Specially designed handle:** For fast cable changing without having to go inside the unit
- **Safety grid:** Earthed safety grid fitted as standard
- **Safety first:** Front accessories safety cable attachment point

Picture:306L

DSEN004_306LPC - 05/02/2015


Robert Juliat reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice.

Robert Juliat S.A.S., 32 rue de Beaumont, 60530 Fresnoy-en-Thelle - France
Telephone : +33 (0)3 44 26 51 89 - fax : +33 (0)3 44 26 90 79 - info@robertjuliat.fr
www.robertjuliat.com



ROBERT JULIAT

Admissible lamps



Lamp type: Tungsten
Socket: Gx9.5

Reference	Power	Lumen output	Colour temperature	Lamp life
LIF: T19 (T11) - ANSI: FWP/FWR	1 000 W	21 000 lm	3050K	750 h
LIF: CP70 - ANSI: FVA/FVB	1 000 W	26 000 lm	3200K	200 h

Optics

Characteristics

- **Type:** Single lens
- **Beam range:** 10° to 66°
- **Lens:** 150 mm Plano Convex lens

Gel filter



- **Shape:** Square
- **Standard size:** 180x180 mm (7.1x7.1")

Front extension cassette for 215x215mm accessories recommended for dark colours

Photometrics

with LIF: CP70 - ANSI: FVA/FVB source



• Optics @ 10°

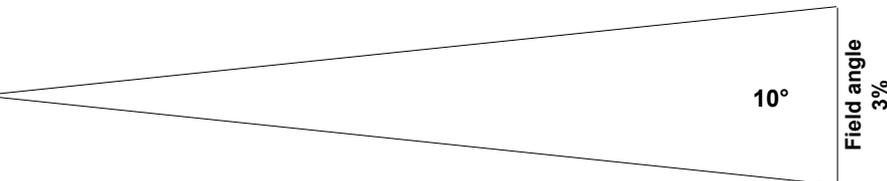

Beam intensity
54 500 cd

Distance	3 m	5 m	7 m	10 m	12 m	15 m
Diameter	0.5 m	0.9 m	1.2 m	1.7 m	2.1 m	2.6 m
Illumination	6 100 lux	2 200 lux	1 150 lux	550 lux	380 lux	250 lux
Distance	10 ft	15 ft	25 ft	35 ft	40 ft	50 ft
Diameter	1.7 ft	2.6 ft	4.4 ft	6.1 ft	7 ft	8.7 ft
Illumination	550 fc	250 fc	90 fc	45 fc	35 fc	22 fc


• Optics @ 66°

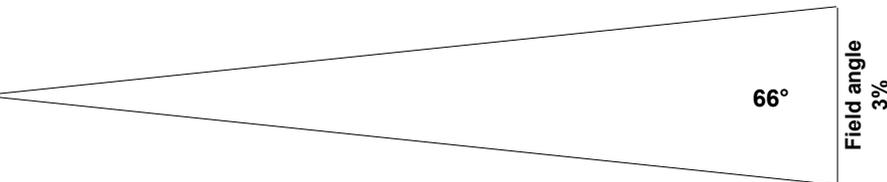

Beam intensity
7 300 cd

Distance	3 m	5 m	7 m	10 m	12 m	15 m
Diameter	3.9 m	6.5 m	9.1 m	13 m	15.6 m	19.5 m
Illumination	820 lux	300 lux	150 lux	75 lux	55 lux	33 lux
Distance	10 ft	15 ft	25 ft	35 ft	40 ft	50 ft
Diameter	13 ft	19.5 ft	32.5 ft	45.5 ft	52 ft	64.9 ft
Illumination	75 fc	33 fc	12 fc	6 fc	5 fc	3 fc

Dimensions, weight and volumes

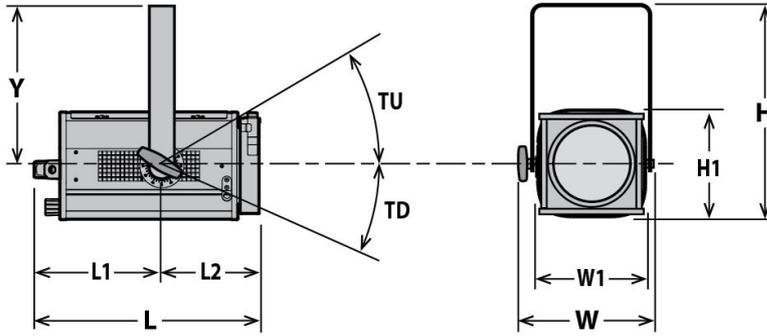

Weight: 7.2 kg (15.8 lbs)


Height	Length	Width	Yoke	Tilt
H= 385 mm (15.2 in)	L= 430 mm (16.9 in)	W= 300 mm (11.8 in)	Y= 290 mm (11.4 in)	TU= TBD°
H1= 210 mm (8.3 in)	L1= 245 mm (9.6 in) L2= 185 mm (7.3 in)	W1= 208 mm (8.2 in)		TD= TBD°

Shipping

- **Weight :** 8 kg (17.6 lbs)
- **Volume :** .05 m³ (1.77 ft³)

Installation

- **Minimum distance to illuminated surface:** 1.1 m (3.6 ft)
- **Operating position:**



Approvals



Construction

- **Housing:** Steel sheet - Aluminium
- **Colour:** Black
- **Cooling:** Convection cooling
- **Maximum ambient temperature (Ta):** 40°C (104°F)
- **Maximum case temperature (Tc) :** 240°C (464°F)
- **Total heat dissipation:** 3 413 BTU/h
- **Protection rating:** 20

Electrical compatibility

- 230/240 V - 50 Hz
- 115/120 V - 60 Hz

Power cable



- **Cable:** H07RNF 3G1.5
- **Length:** 3 m (9,8 ft)
- **Connectors:**
In: CEE 7/7 (2P+E NF/Schuko)
Out: Not removeable

Power consumption

Voltage	Frequency	Current	Power
230 V	50 Hz	5 A	1000 W

Model

306LPC	1000 W Tungsten Single lens luminaire - Gx9.5 socket - 150mm Plano Convex - 306LPC Lutin
---------------	--

Options

PCP1716A	16A blue 2P+E 6h IEC60309 power connector	
-----------------	---	---

Accessories

PF500M2	180x180mm metal filter holder 1 included	
G500	180x180mm safety grid 1 included	
CP70	CP70 - Gx9.5 1000W 230V 200h 3200K lamp	
T19 (T11)	T19 (T11) - Gx9.5 1000W 230V 750h 3050K lamp	
CF500	4 rotating leaves on a rotating barndoor - 180x180mm (without safety cable) - Weight: ,82 Kg	
L 150 F	Ø150 R110 Fresnel lens with lens holder - Weight: ,45 Kg	
L 150 PB	Ø150 R106 Pebble convex lens with lens holder - Weight: ,84 Kg	
876	Hook clamp 40x10mm with 28mm M10 screw for Ø35 to 50mm pipes - SWL: 50Kg - Weight: 1,25 Kg	
880	Hook clamp 40x10mm with 28mm M10 screw for Ø50 to 63mm pipes - SWL: 50Kg - Weight: 1,36 Kg	
CS2	Safety cable Ø3 mm L= 600mm - SWL: 75 Kg	