

PICA CUBE™ WNC

DESIGNED BY THE BLACK TANK




Brilliant Tunable White Light

The Pica Cube™ WNC packs an unprecedented 20 watts of output into just a 2.5 inch cube! Utilizing Black Tank's Gen2 controls and patented heat management technology, Pica Cube™ WNC provides an amazing amount of high quality light for clean and simple installations for archtainment, retail, cruise ship, museum, and architectural illumination applications.

Sharing the same best in class Warm, Neutral and Cool White Cree XML 4W emitters used in Pica's bigger sibling, the Miro and Braq Cubes™, the WNC is capable of generating 2700k to 6500k white light at up to 92 CRI output.

Pica Cube™ can be used as a standalone, plugged directly into AC Mains with an available transformer, and controlled using the easy-to-use manual interface. An available Portal Box can provide power + data through a common Cat5 cable, powering and controlling up to four Pica Cubes via POE.

The Pica Cube™ is also offered in an all Warm White (3W) package and an all Neutral White (3N) package.

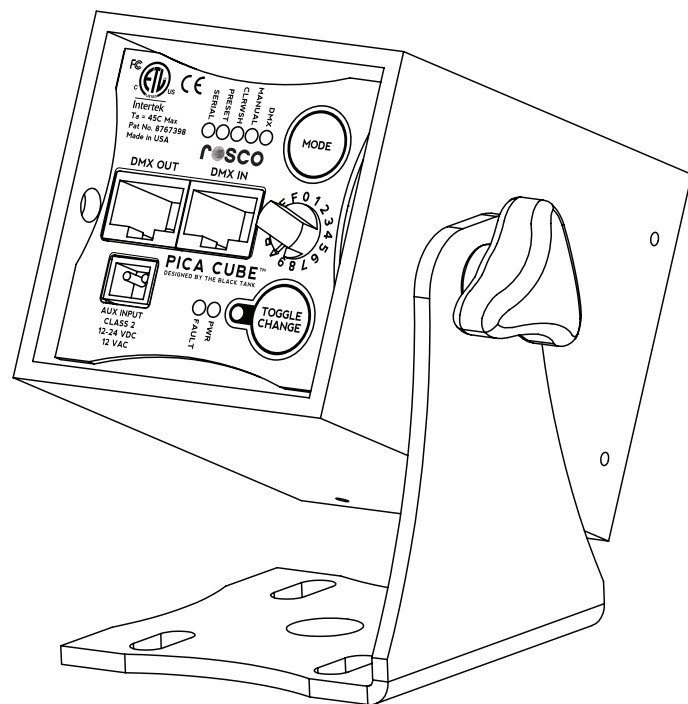

Key Features

- Balanced assortment of warm, neutral and cool LEDs provide a bright yet versatile punch of white light
- Unique patented (US Patent No. 8,767,398) heat management system packs the most lumens into the smallest form factor
- Variable power input from 12-24VDC or 12VAC enables versatile power options
- Over 90 luminaires on a single 20A circuit
- Modular design easily configures in strips and arrays for maximum versatility
- Flicker-free dimming in 8 or 16 bit resolution
- Intuitive touch panel interface for manual control
- Easily installed in many applications using CAT5 cable that carries Power + Data
- Full assortment of spot, medium and wide lenses included
- Novel “filament mode” mimics the delayed blackout glow of incandescent fixtures

PICA CUBE™ WNC

DESIGNED BY THE BLACK TANK



SPECIFICATIONS

Input Voltage:	12-24VDC or 12VAC
Power Consumption:	20 Watt at maximum output
Power Input:	12-24V Wall Adapter or CAT5 (Power +Data)
LED:	3 X 4W Cree XM-L2 LEDs
Data:	DMX, RJ45 Connectors
Output:	1420 Lumens
Color Range:	WNC: 2700K - 6500K 3W: 2700K 3N: 4000K
Operation:	DMX: 8 or 16 bit DMX512/Manual: Rotary Knob
Operating Temp.:	-13° to 113° F (-20° to 45° C)
Humidity:	0 - 95% non-condensing
Dimensions:	2.5in x 2.5in x 3.6 in (63.5mm x 63.5mm x 91mm)
Weight:	0.9 lbs (0.41kg)
Housing:	Powder Coated Aluminum Extrusion (1/8" wall)
Approvals:	FCC Class A Radiated and Conducted ETL / UL Standards 1573 and 8750 cETL / CSA C22.2 #166-M1983 CE / IP20 Rated

PICA CUBE ACCESSORIES

Top Hat
Egg Crate Louver
Barn Doors (Set of 4)
Mounting Hardware
Symmetrical Diffusers
Assymmetrical Diffusers
Wall Power Adapter

PART NUMBERS

WNC Black:	515 90200 1020
WNC White:	515 90200 2020
3W Black:	515 90200 1021
3W White:	515 90200 2021
3N Black:	515 90200 1022
3N White:	515 90200 2022

