

exalux

▼ CONNECT ONE



WIRELESS CONTROL FOR DMX DEVICES


CONNECT ONE is a box which created its own wifi and which enables you to control any DMX devices with an iPad or an iPhone.

CONNECT ONE is totally plug and play and does not require any special setting.

CONNECT ONE simplifies the DMX devices installations, then you will save time and benefit of more creativity

MAIN FEATURES

- ▶ Wi-Fi/Art-Net/DMX Node
- ▶ Wi-Fi access embedded
- ▶ Control and management by an embedded web server
- ▶ It still works during an powered change
- ▶ Work up to 8 hours with the EXALUX 8.14Wh Power Bank
- ▶ 2 Power input
- ▶ A control until 100m⁽¹⁾
- ▶ Compatible with Art-Net applications EXALUX DMX CONNECT and Luminair

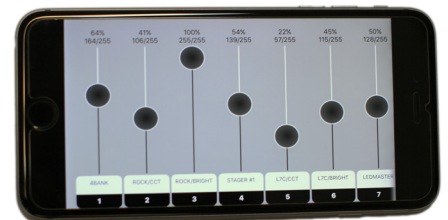

(1) According to the environment

INTERFACE WLAN

Standard :	IEEE 802.11g
Opérating Channels :	2.4 ~ 2.4835 GHz (US/Canada/Europe)
Antennas Connector :	RP-SMA (female)
TX Transmit Power :	17,5 dB
RX Sensivity :	-98,5 dB
LED Indicators :	WLAN Connection

DMX INTERFACE

In Put :	Art-Net (univers configurable) on Wi-Fi
Out Put :	DMX512 (1 universe) on NEUTRIK XLR-5 Female
LED Indicators :	Art-Net witness

ELECTRIC FEATURES

DC Input Voltage :	5-24 VDC / XLR 4 PTS
AC Input Voltage :	110-220 VAC / powerCON
Power consumption :	<1W

MECANICAL FEATURES

Housing :	Aluminium
Dimensions :	141x144x43mm
Weight :	500g
Protection class :	IP20
Mounting :	INSERT 5/8 UNC

GENERAL FEATURES

Protocoles supportés :	Wi-Fi / Art-Net / DMX
Piloting modes :	iPad and iPhone by applications
Autonomy :	8 hours with an EXALUX battery 8.14Wh
Certifications :	CE, RoHS
Warranty :	2 years

