



# Highlights:

- · Stores up to 27 units of 19" Equipment
- · Punched square holes for use with snap-in cage nuts
- · Cable entry on bottom
- 1.5 mm thick cold rolled steel frame
- Easy assembly in 5 minutes
- · Removable rear panel

### Product information:

The PR227 is a professional 19" metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. The rack comes in a flat pack as DIY kit. It is a solid construction with a 1.5 mm thick cold rolled steel frame and plates, finished with a black (RAL9004) fine structured powder coating. The rack is provided with punched rack profiles for use with snap-in cage nuts on the front side and stores up to 27 units. The rear panel can be screwed off for easy installation and has a cable entrance on the bottom. Optional available wheels provide mobility to the equipment.




### **Product Features:**

Dimensions	540 x 1254 (1272) x 500 mm (W x H (incl. feet) x D)	
Unit height	27 HE	
Weight	34 kg	
Colours	Black (RAL9004)	
Max. usable depth	475 mm	

# Shipping & Ordering:

Accessories	Optional	KM600 - M6 Cage nuts
		KS600 - M6 x 16 mm bolt DIN7985 Black

PR210WS - Wheel set for PR2xx racks

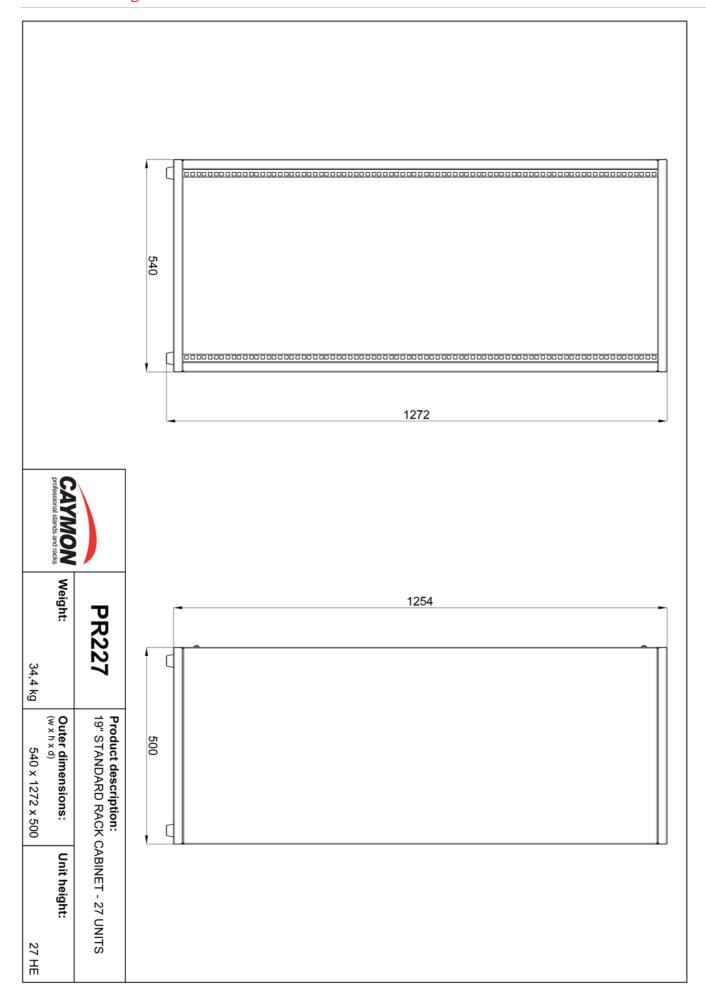

# Architects' and Engineers' Specifications:

The rack shall be a floor standing type with following dimensions: Height 1272 mm, Depth 500 mm, Width 540 mm, have a Weight of 34 kg and hold up to 27 units. The rack will have to comply with ANSI/EIA RS 310D, DIN41491 and IEC60297 standards. The rack shall be constructed out of cold rolled steel with a thickness of 1.5 mm and have a textured powder coating in black (RAL9004) color. The rack will come as a flat pack DIY kit which is quick & amp; easy to assemble. The back panel of the rack will be removable and fitted with a cable entry on the bottom. The rack shall have mounting profiles on the front with punched square holes for use with snap-in cage nuts for easy mounting of equipment. The rack will have optional wheels for mobility.